


MYERS® APLEX SERIES

MA-300L-HD

QUINTUPLEX PLUNGER PUMP

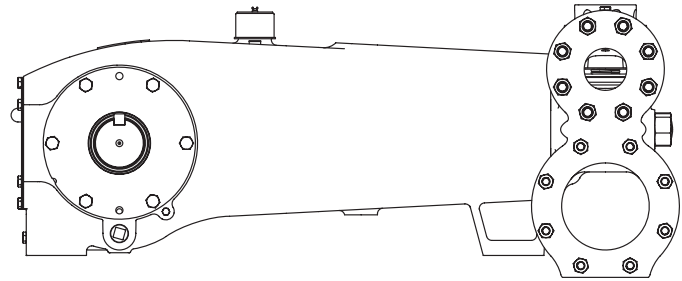

Number of Plungers.....	5
Maximum Rated Speed.....	400 RPM
Stroke Length.....	5.00 inches – 127 mm
Maximum Rated Power.....	340 HP – 254 kW
Maximum Rod Load.....	12,125 lbs. – 53.9 kN
Weight.....	5,050 lbs.

English Units

PLUNGER DIAMETER IN.	STUFFING BOX BORE IN.	MAX. PSI (ROD LOAD)	*GALLONS PER REV.	200 RPM US GPM	250 RPM US GPM	300 RPM US GPM	350 RPM US GPM	400 RPM US GPM
4.000	5.000	965	1.3600	272.0	340.0	408.0	476.0	544.0
3.875	5.000	1028	1.2763	255.3	319.1	382.9	446.7	510.5
3.750	5.000	1098	1.1953	239.1	298.8	358.6	418.4	478.1
3.625	5.000	1175	1.1170	223.4	279.2	335.1	390.9	446.8
3.500	4.500	1260	1.0412	208.2	260.3	312.4	364.4	416.5
3.375	4.500	1355	0.9682	193.6	242.1	290.5	338.9	387.3
3.250	4.500	1462	0.8978	179.6	224.5	269.3	314.2	359.1
3.125	4.000	1581	0.8301	166.0	207.5	249.0	290.5	332.0
3.000	4.000	1715	0.7650	153.0	191.2	229.5	267.7	306.0

*HP REQUIRED @ RPM***

170 213 255 298 340

Metric Units

PLUNGER DIAMETER mm	STUFFING BOX BORE mm	MAX. BAR (ROD LOAD)	*LITERS PER REV.	200 RPM LPM	250 RPM LPM	300 RPM LPM	350 RPM LPM	400 RPM LPM
101.6	127.0	66.5	5.1481	1029.6	1287.0	1544.4	1801.9	2059.3
98.4	127.0	70.9	4.8314	966.3	1207.9	1449.4	1691.0	1932.6
95.3	127.0	75.7	4.5247	904.9	1131.2	1357.4	1583.7	1809.9
92.1	127.0	81.0	4.2281	845.6	1057.0	1268.4	1479.8	1691.2
88.9	114.3	86.9	3.9416	788.3	985.4	1182.5	1379.5	1576.6
85.7	114.3	93.4	3.6650	733.0	916.3	1099.5	1282.8	1466.0
82.6	114.3	100.8	3.3986	679.7	849.6	1019.6	1189.5	1359.4
79.4	101.6	109.0	3.1422	628.4	785.5	942.7	1099.8	1256.9
76.2	101.6	118.3	2.8958	579.2	724.0	868.7	1013.5	1158.3

*kW REQUIRED @ RPM***

127 159 190 222 254

**Displacement based on 100% Volumetric Efficiency*

***Power based on 90% Mechanical Efficiency*





$$\text{HP} = \frac{\text{US GPM} \times (\text{Discharge psig} - 1/2 \text{ Suction psig})}{1542}$$

$$\text{kW} = \frac{\text{M}^3/\text{HR} \times (\text{Discharge Bar} - 1/2 \text{ Suction Bar})}{32.4}$$

$$\text{PUMP RPM} = \frac{\text{US GPM Desired}}{\text{US GPM per Revolution of Selected Plunger}}$$

$$\text{PUMP RPM} = \frac{\text{M}^3/\text{HR Desired}}{\text{M}^3 \text{ per Revolution of Selected Plunger}}$$

MA-300L-HD Quintuplex Pump

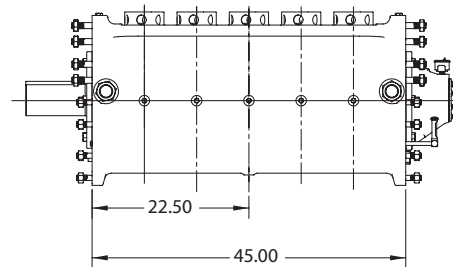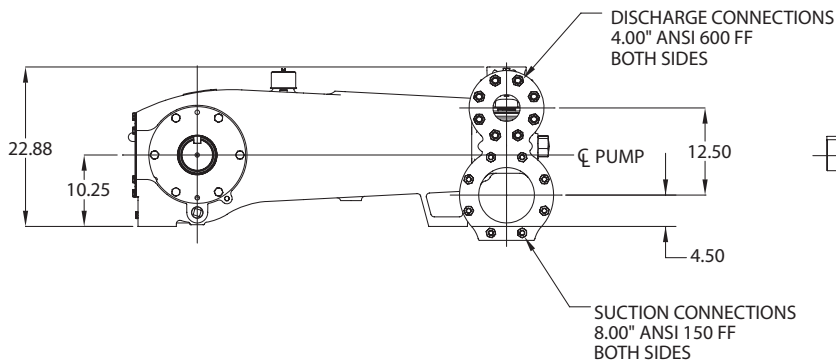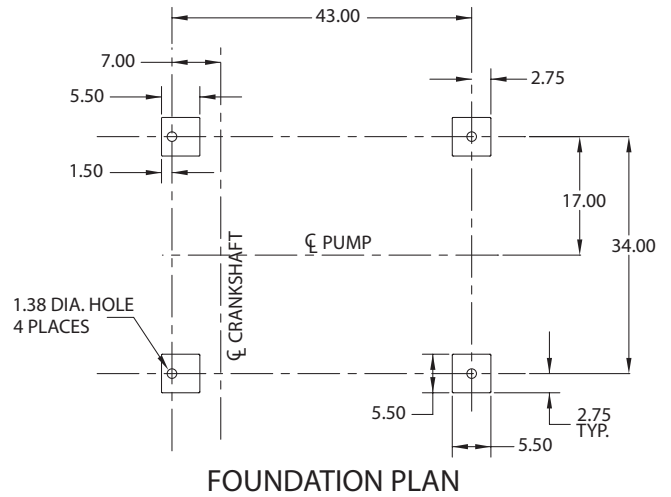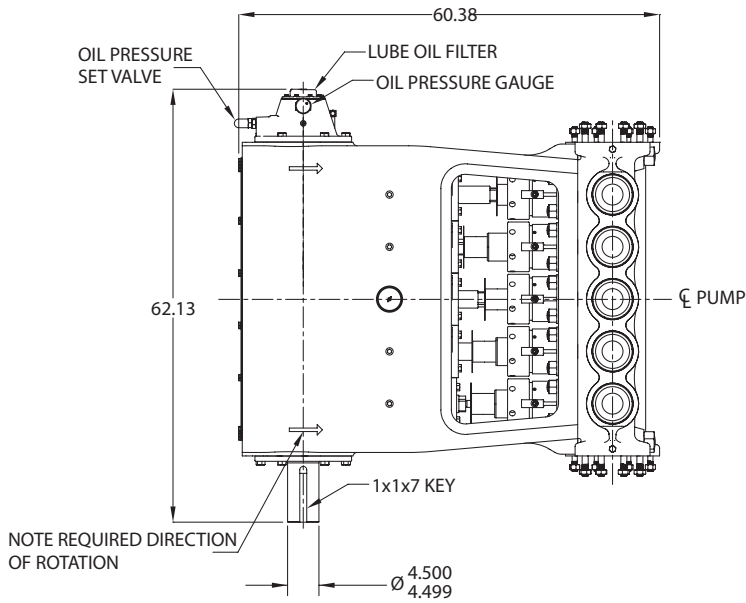

Engineering Data

MA-300L-HD Quintuplex Pump

Power End Engineering Data

Maximum Input HP @ Speed.....	340 @ 400 RPM
Rated Continuous Plunger Load	12,125 lbs.
Maximum Rated Continuous Speed.....	400 RPM
Normal Continuous Speed Range.....	150 to 400 RPM
Minimum Speed	100 RPM
Oil Capacity.....	66 U.S. Quarts
Power End Oiling System.....	Pressure Lubrication System
Power Frame, One-Piece.....	Cast Iron
Crosshead, Full Cylindrical.....	Cast Iron
Crosshead, Diameter x Length.....	5-3/4 x 6-3/16 inches
Crankshaft.....	Ductile Iron
Crankshaft Diameters:	
At Tapered Roller Bearings	4-3/4 inches
At Crankpin Bearings, Diameter x Length	4-1/2 x 3-3/4 inches
Crosshead (Wrist) Pin, Case-Hardened and Ground.....	AISI 8620
Main Bearings, Tapered Roller.....	Timken®
Crankpin Bearings, Precision Automotive	Steel Backed, Babbitt-Lined
Extension (Pony) Rod, Integral with Plungers	17-4 PH SS
Connecting Rod, Automotive Type	Ductile Iron
Average Crosshead Speed @ 450 RPM	333 fpm
Minimum Life Expectancy, Main Bearings, L ₁₀	65,000+ hr.

Liquid End Engineering Data

Maximum Continuous Working Pressure.....	1,715 psi
Hydrostatic Test.....	2,220 psi
Available Liquid End Materials, ASTM	
Nickel Aluminum Bronze Casting.....	B148-C955
Carbon Steel Block.	A105
Stainless Steel Block	Various Grades
Plunger Type "Rokide" (Chromium Oxide-Coated).....	316 SS
Stuffing Boxes, Field-Removable and Replaceable	Nickel, Aluminum, Bronze, Optional Carbon Steel
Packing Types Available:	
Gland-Loaded, Non-Adjustable.....	Style 838
Spring-Loaded, Braided Teflon® & Kevlar®	Style 140
Spring-Loaded, Cup-Type	Style 120X
Spring-Loaded, Garlock	Style 892IK
Valve Cover and Cylinder Head Plugs.....	316 SS
Retainer Plates, Ductile Iron, ASTM.....	A536 80-55-06
Seals, Stuffing Boxes, Valve Covers, Cylinder Heads	Buna-N
Disc Valve Types:	
Regularly Furnished, Acetal Resin	Delrin®
Optional, Hardened and Lapped	17-4 PH SS
Valve Spring Material.....	Inconel®
Valve Seat, Liquid Passage Areas	6.54 square inches
Average Liquid Velocity with 4" plungers @ 400 RPM	
Through Valves	10.7 fps
Through Suction Manifold.....	3.5 fps
Through Discharge Manifold.....	13.9 fps



740 EAST 9TH STREET,
ASHLAND, OHIO 44805
WWW.MYERSAPLEX.COM

269 TRILLIUM DRIVE, KITCHENER,
ONTARIO, CANADA N2G 4W5
WWW.MYERSAPLEX.COM

Delrin® is a registered trademark of E.L. duPont
Inconel® is a registered trademark of the Special Metals family of companies
Timken® is a registered trademark of The Timken Company
Myers® is a registered trademark of Pentair Ltd.

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.
A-02-1066 03/20/13 © 2013 Pentair Ltd. All Rights Reserved.

www.powerzone.com